

# Heating Cable

## CWM



### Constant Wattage Medium Temperature

- Uniform Thermal Output, Low Energy Cost
- No Inrush at Any Ambient
- Industrial/Process and Commercial/Construction Applications
- Maximum Exposure Temperature, Power Off, 392°F (200°C)
- Steam Cleanable on Process Equipment Up to 190 PSIG (Power Off)
- 4, 8 and 12 W/Ft.
- 120, 208 - 277 and 480 Volt From Stock
- Approximate Size .30"W x .25"H
- Minimum Bend Radius 1-1/4"
- For Use on Metallic Pipes
- Consult Factory for Use on Plastic Pipes


#### Description

Chromalox CWM constant wattage heating cable is a proven, reliable solution for industrial process temperature maintenance and freeze protection. CWM features a parallel heating core that produces uniform thermal output over its entire length. Using a single power point, you can easily configure and install a heat tracing system as short as several feet or as long as 780 feet right in the field. With 392°F (200°C) fluoropolymer electrical insulation over-jacketing, CWM has outstanding electrical and thermal properties, and is well suited for most chemically hostile environments.


**WARNING** — A ground fault protection device is required by NEC to minimize the danger of fire if the heating cable is damaged or improperly installed. A minimum trip level of 30mA is recommended to minimize nuisance tripping.

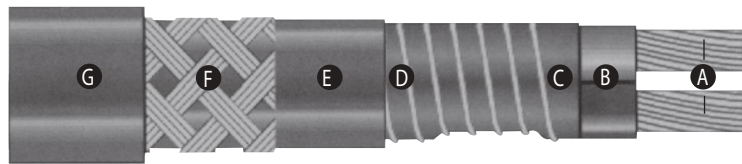

Cut to Length  
in Field



Medium Tem-  
perature



Constant Watt-  
age Output

**Note** — Consult maximum maintenance temperature chart on page G-23 for allowable watt densities.

#### Features

- Durable, non-aging fluoropolymer jacket ensures long service life and can be used in some hostile environments.
- Flexible, easy to install on most equipment and delivers long-term reliable performance.
- Eliminates the need for oversized wiring or switchgear.
- Accurate temperature, reliable electric heat that can be consistently controlled and easily monitored.
- Safe and rugged.
- Parallel circuitry allows cut-to-length.
- High performance, rated to withstand up to 392°F saturated steam (190 psig) temperature (power off).
- Low profile, uses standard size thermal insulation on piping and process equipment.

#### Construction

- A Twin 12 AWG Copper Buss Wires** — Provide reliable, consistent electrical current.
- B FEP Insulation Jacket** — Electrically insulates buss wires.
- C Pairing Jacket** — Secures two buss wires together and provides wrapping surface for Nichrome wire.

- D Nickel Chromium Wire** — Heating component of the cable.
- E FEP Insulation** — Rugged outer sheath protects heating cable, assures longer service life, and provides protection against environmental application hazards.
- F Tinned Copper Braid** — Plated copper braid increases robust construction, provides ground path and provides additional protection in any location. Suffix "C" in model number.
- G FEP Overjacket** — Fluoropolymer over-jacket, over the braid, provides protection from most aqueous and chemically corrosive solutions. Suffix "T" in model number.

#### Approvals<sup>1</sup>

UL Listed for ordinary areas.

CSA Certified for ordinary and:

- Class I, Div. 2, Groups A, B, C, D
- Class II, Div. 2, Groups F, G. Rated T3 Temperature Class<sup>2</sup>.


#### Notes

1. Depends on specific model.
2. Exception: Cable surface temperature shall not exceed 190°C in Class II, Div. 2, Group F; 165°C in Class II, Div. 2, Group G.

# Heating Cable

## CWM

### Constant Wattage Medium Temperature (cont'd.)

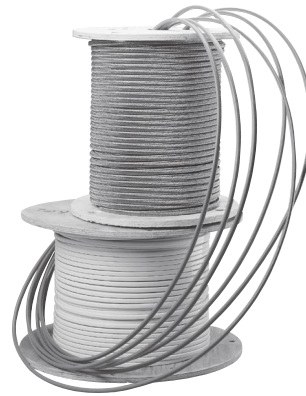

#### Specifications

| Model    | Output (W/Ft.) | Nominal Voltage (Vac) | Circuit Load (Amps/Ft.) | Max. Circuit Length (Ft.) | Length Between Nodes (in.) | Jacket Color |
|----------|----------------|-----------------------|-------------------------|---------------------------|----------------------------|--------------|
| CWM 4-1  | 4              | 120                   | 0.033                   | 600                       | 36                         | Blue         |
| CWM 8-1  | 8              | 120                   | 0.067                   | 290                       | 24                         | Orange       |
| CWM 12-1 | 12             | 120                   | 0.100                   | 200                       | 24                         | Black        |
| CWM 4-2  | 4              | 240                   | 0.017                   | 1100                      | 48                         | Green        |
| CWM 8-2  | 8              | 240                   | 0.033                   | 600                       | 36                         | Yellow       |
| CWM 12-2 | 12             | 240                   | 0.050                   | 400                       | 48                         | White        |
| CWM 12-4 | 12             | 480                   | 0.025                   | 800                       | 72                         | Green        |

#### Output Wattage a Various Operating Voltages (per ft.)

| Model    | 120V | 208V | 220V | 240V | 277V | 480V |
|----------|------|------|------|------|------|------|
| CWM 4-1  | 4    | –    | –    | –    | –    | –    |
| CWM 8-1  | 8    | –    | –    | –    | –    | –    |
| CWM 12-1 | 12   | –    | –    | –    | –    | –    |
| CWM 4-2  | –    | 3    | 3.4  | 4    | 5.3  | –    |
| CWM 8-2  | –    | 6    | 6.7  | 8    | 10.7 | –    |
| CWM 12-2 | –    | 9    | 10.1 | 12   | 16   | –    |
| CWM 12-4 | –    | 2.3  | 2.5  | 3    | 4    | 12   |

#### Maximum Allowable Pipe Maintenance Temperature with Power On

| Output (W/Ft.) | Temperatures (°F) |     |     |     |     |     |      |      |     |
|----------------|-------------------|-----|-----|-----|-----|-----|------|------|-----|
|                | 3                 | 4   | 6   | 6.7 | 8   | 9   | 10.1 | 10.6 | 12  |
| w/o AT-1 Tape  | 340               | 325 | 293 | 282 | 262 | 246 | 229  | 222  | 200 |
| w/ AT-1 Tape   | 350               | 344 | 332 | 328 | 320 | 314 | 307  | 304  | 296 |

CONSTANT  
WATTAGE

# Heating Cable

## CWM

### Constant Wattage Medium Temperature (cont'd.)

#### Ordering Information

| Output (W/Ft.) | Nominal Voltage (Vac) | Model      | Stock | PCN    | Wt./1000' (Lbs.) |
|----------------|-----------------------|------------|-------|--------|------------------|
| 4              | 120                   | CWM 4-1CT  | S     | 392075 | 110              |
|                | 240                   | CWM 4-2CT  | S     | 392083 | 110              |
| 8              | 120                   | CWM 8-1CT  | S     | 392163 | 110              |
|                | 240                   | CWM 8-2CT  | S     | 392171 | 110              |
| 12             | 120                   | CWM 12-1CT | S     | 392251 | 110              |
|                | 240                   | CWM 12-2CT | S     | 392260 | 110              |
|                | 480                   | CWM 12-4CT | S     | 392278 | 110              |

#### Accessories

| Accessories   |   | U Series | DL      | EL      |
|---|---|----------|---------|---------|
| Power Connection  | Heat trace to electrical service connection | UPC      | RTPC    | SSK     |
| Splice & Tee  |   | UMC      | RTST    | RT-TST  |
| End Seal  | For terminating cable                       | UES      | RTES    | N/A     |
| Lighted End Seal  |   | UESL     | RTST-SL | N/A     |
| Thermostat  | Ambient air sensing thermostat              | UAS      | RTAS    | THL/TXL |
|   | Line sensing mechanical thermostat          | UBC      | RTBC    | THR/TXR |
| <b>To Order —</b> General Application & Installation Accessories such as tape, pipe straps, warning labels, etc., refer to the U Series, DL & EL General Application Accessories page at the end of this section. |   |          |         |         |

#### Ordering Information

To Order —  
Complete the  
Model Number  
using the Matrix  
provided.

| Model      | Constant Wattage Medium Temperature                |  |          |           |                             |
|------------|--|--|----------|-----------|-----------------------------|
| CWM        | Constant Wattage, Medium Temperature Heating Cable |  |          |           |                             |
|            | <b>Code</b>  | <b>Output (W/Ft.)</b>  |          |           |                             |
|            | 4  | Four   |          |           |                             |
|            | 8  | Eight  |          |           |                             |
|            | 12   | Twelve   |          |           |                             |
|            | <b>Code</b>  | <b>Nominal Voltage (Vac)</b>   |          |           |                             |
|            | 1  | 120  |          |           |                             |
|            | 2  | 240  |          |           |                             |
|            | 4  | 480  |          |           |                             |
|            | <b>Code</b>  | <b>Overjacket Options</b>  |          |           |                             |
|            | CT   | Fluoropolymer corrosion resistant overjacket over braid for hostile/corrosive environments |          |           |                             |
| <b>CWM</b> | <b>4</b>   | <b>-</b>   | <b>1</b> | <b>CT</b> | <b>Typical Model Number</b> |