

IntelliTrace CTC Commercial Heat Trace Controller

- 1 & 2 Circuit Models
- 40 Amps per Circuit
- SSR Control
- 100 – 277 VAC, 50/60 Hz
- cULus Non Hazardous Areas
- Soft Start Feature
- Operating Temperature:
-40°F to 104°F (-40°C to 40°C)
- Modbus RTU/RS485, RS422,
TCP/Ethernet, & BACnet
- 10" x 8" x 6" (26cm x 21cm x
15cm) NEMA 4X FG Wall Mount
Enclosure
- High Resolution Color TFT
Display
- LED Indication for Power, Load
& Alarm per Circuit
- Front Panel Capacitive Touch
Switches
- PID, On/Off or Manual Control
Modes
- One or Two Sensor Inputs /
Circuit – Min, Max & Averaging
- 2 Circuit Ambient Control from 1
RTD Sensor
- Full Monitoring & Alarms
- High / Low Temperature &
Current, GFEP & Sensor Failure
- Programmable Duty Cycle On
Sensor Failure
- AC & DC Alarms
- Password Protected Security
Levels



Description

The Chromalox IntelliTRACE CTC is a microprocessor based system with SSR power control that switches 40 Amps per circuit at 120-277 VAC. The CTC is a single or dual point commercial heating cable controller with integrated ground-fault protection. This controller may be used with CZH, CMi or CPR heating cables. The CTC is intended for use in commercial nonhazardous applications.

There are three user-selectable control modes available on the CTC: Manual, Off or Auto. An output of 1% to 100% is available while in Manual Mode and you may choose either PID or ON/OFF control while in the Auto Control Mode.

You may employ one or two RTD sensors per circuit. When using two RTD sensors, the CTC may be set to Low, High or Average. The CTC may also be configured as a 2-circuit ambient sensing controller that uses only one RTD to control both circuits. This provides the owner with much more flexibility and redundancy to help meet their evervarying demands.

The CTC employs a soft start feature that uses a proprietary software algorithm which reduces the inherent self-regulating in-rush current, resulting in less nuisance tripping at cold temperatures. The soft start feature is selectable which allows this controller to be employed in non-heat trace applications as well.

All process conditions may be monitored and managed both locally and remotely. All process variable, communication and alarm settings and security codes are user-adjustable via simple page menu navigation.

In terms of system supervision, the CTC controller monitors temperature, current load and ground fault equipment protection leakage current (GFEP). Additionally, the alarms on the CTC consist of high and low temperature, high and low current, high GFEP current and sensor failure.

Should the CTC unit realize a failed sensor, the controller automatically switches into a user adjustable manual output duty cycle. To eliminate abrupt current spikes, the Chromalox CTC employs bumpless transfer power switching when switching over from either manual or auto mode.

The CTC unit is housed in a compact wall mountable, NEMA 4X FG or optional 316 SS enclosure and it features a high resolution TFT display, LED indication of Load, Power & Alarm status for each circuit and front panel capacitive touch user interface buttons which are mounted on a hinged door.

The CTC enclosure provides electrical connections for the heating cable, the AC Power and the RTD Sensors and it comes complete with stainless steel mounting brackets.

IntelliTrace CTC Commercial Heat Trace Controller (cont'd.)

Specifications

Input

| | |
|-------------------------------|----------------------------------------------------------------------------------------------------------|
| Sensor Type | 3-wire RTD, 100 Ω PT, 0.00385 $\Omega/\Omega^{\circ}\text{C}$, 20 Ω balanced lead wire |
| Number of Sensor Inputs | 1 or 2 per Circuit |
| Sensing Configuration | Range: Single, Low, High, Average, Use RTD1 to control both circuits |

Output

| | |
|--------------------------|---------------------|
| Power Switching | SSR |
| Number of Circuits | 1 or 2 |
| Capacity | 40 Amps per Circuit |

Control Types

| | |
|-------------------------------------------------|----------------------------------|
| PID | Control mode must be set to Auto |
| Autotune | On or Off |
| Proportional Band, ($^{\circ}\text{F}$) | Range: 1 – 100 |
| Integral (sec/repeat) | Range: 0 – 9,999 |
| Rate or Derivative, (seconds) | Range: 0 – 500 |
| On/Off | Control mode must be set to Auto |
| Dead band, ($^{\circ}\text{F}$) | Range: 2 – 100 |
| Manual | Range: 0 – 100% |
| Soft Start, Current Clamping | Enable or Disable |

Settings

| | |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Temperature (PV) | Range: -80 $^{\circ}\text{F}$ to +1100 $^{\circ}\text{F}$ (-62 $^{\circ}\text{C}$ to +593 $^{\circ}\text{C}$) |
| Low Temperature Alarm | Range: -80 $^{\circ}\text{F}$ to +1050 $^{\circ}\text{F}$, Off (-62 $^{\circ}\text{C}$ to +566 $^{\circ}\text{C}$, Off) |
| High Temperature Alarm | Range: -80 $^{\circ}\text{F}$ to +1150 $^{\circ}\text{F}$, Off (-62 $^{\circ}\text{C}$ to +621 $^{\circ}\text{C}$, Off) |
| Low Current Alarm | Range: 0.1 A – 50.0 A, Off |
| High Current Alarm | Range: 0.1 A – 50.0 A, Off |
| GFEP | Range: 30 mA – 150 mA |
| GFEP Alarm Condition | Alarm Only, Alarm & Trip, Alarm & Latch, Alarm & Trip & Latch |
| Output on Sensor Failure | Range: 0–100%, Bumpless Transfer to Manual Mode |
| Calendar | Year, Month, Day, Date, Hour & Minute |
| Audible button depress | Range: On, Off |
| Security | 3 Levels of password protected security |
| Alarm State | Normally Open, Normally Closed |

Display, HMI, Indication

| | |
|-----------------------|----------------------------------------------------|
| Display | 3.5" 320 x 240 RGB Full color graphic TFT module |
| Human Interface | 5 Capacitive Touch Input Buttons |
| LED Indication | Power (Green), Load (Amber), Alarm (Red) – Per Ckt |

Alarms

| Alarm Types | Low & High Temperature, Low & High Current, High GFEP, Sensor Failure | | | | | | | | | | | | |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------|----------|------------------|--------|------|-----------------|------|--------|-----------|------|------|
| Alarm Relays | 1 x DC Alarm Output, 1.8 Amp, 0 - 50 VDC 1 x AC Alarm Output, 1.8 Amp, 12 - 240 VAC | | | | | | | | | | | | |
| Alarm Contact State | <table border="1"> <thead> <tr> <th>Mode</th> <th>Default</th> <th>Optional</th> </tr> </thead> <tbody> <tr> <td>Normal Operation</td> <td>Closed</td> <td>Open</td> </tr> <tr> <td>Alarm Condition</td> <td>Open</td> <td>Closed</td> </tr> <tr> <td>Power Off</td> <td>Open</td> <td>Open</td> </tr> </tbody> </table> | Mode | Default | Optional | Normal Operation | Closed | Open | Alarm Condition | Open | Closed | Power Off | Open | Open |
| Mode | Default | Optional | | | | | | | | | | | |
| Normal Operation | Closed | Open | | | | | | | | | | | |
| Alarm Condition | Open | Closed | | | | | | | | | | | |
| Power Off | Open | Open | | | | | | | | | | | |

Communications

| | |
|-----------------------------|--------------------------|
| Modbus | RTU/RS-485 (2 or 4 wire) |
| Modbus | TCP/Ethernet (optional) |
| Webserver/Ethernet IP | (Optional) |
| BACnet Communications | (Optional) |

Operating & Environmental

| | |
|------------------------|-----------------------------------------------------------------------------------------------------|
| Temperature | -40 $^{\circ}\text{F}$ to 104 $^{\circ}\text{F}$ (-40 $^{\circ}\text{C}$ to 40 $^{\circ}\text{C}$) |
| Power Supply | 100 to 277V 50/60Hz |
| Protection | IEC IP66 |
| Enclosure rating | NEMA 4X FG (Optional Stainless Steel) |
| Approvals | UL/cUL Ordinary Area Locations. (UL File: E84610) |


COMMERCIAL HEAT TRACE

IntelliTrace CTC

Commercial Heat Trace Controller (cont'd.)

Dimensions

| | | H | W | D | F | B | M |
|----------------------|------|------|------|------|-----|-----|-----|
| 316 SS Enclosure | Inch | 11.8 | 9.9 | 7.6 | 0.7 | 1.8 | 3.0 |
| | cm | 30.2 | 25.1 | 19.4 | 1.7 | 4.4 | 7.6 |
| Fiberglass Enclosure | Inch | 10.3 | 8.5 | 8.0 | 1.2 | 1.8 | 3.0 |
| | cm | 26.2 | 21.3 | 19.7 | 3.2 | 4.4 | 7.6 |

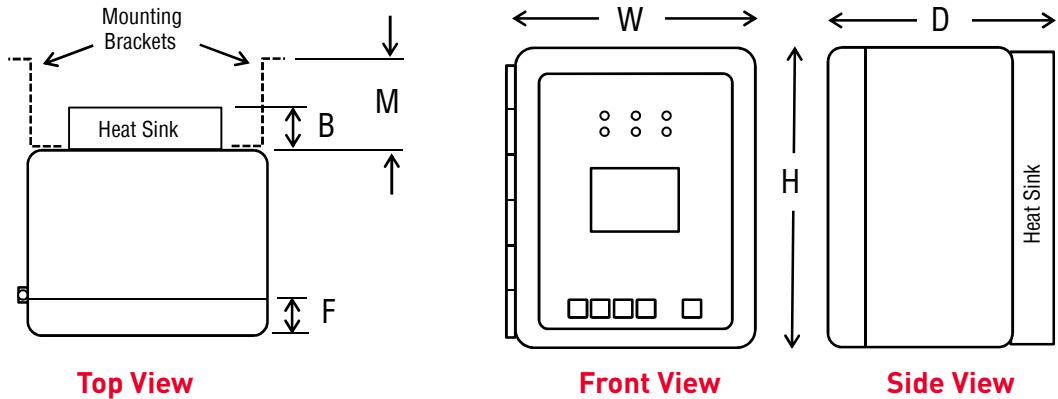

Ordering Information

To Order —
Complete the Model Number using the Matrix provided.

Model Product Description

CTC The Chromalox CTC series IntelliTRACE Controller will control 1 or 2 circuits and is designed for Commercial Heat Trace Line and/or Ambient Sensing applications in Non-Hazardous areas. The CTC is a wall mounted device that operates at 100-277 VAC and rated at 40A per circuit in a -40°F to 104°F (-40°C to 40°C) Ambient. Standard features: NEMA 4X FG enclosure, 3.5" High Resolution TFT Display with integral display heater, front panel capacitive touch switches & LED Indication of Power, Load & Alarm. ON/OFF, PID or Manual SSR power control with a selectable Soft Start program. The CTC accepts up to 2 RTD sensors per circuit for Ambient and/or Line Sensing applications. With multiple sensors, output behavior is based on min, max, average temperature or as 2-circuit ambient sensing control from a single RTD. Other standard features include: 2 x common alarm outputs (1 x AC, 1 x DC), Alarms for Low/High Temperature & Current, GFEP (Ground Fault Equipment Protection) & Sensor Failure, ModBus RTU/RS485 (or /RS422) Communications and user selectable manual output on failed sensor. 16 Gauge Stainless Steel wall mounting brackets are included. UL/cUL Approved Optional features include: NEMA 4X 316 SS Enclosure, ModBus TCP/Ethernet, Webserver/Ethernet or BACnet communications. Standard 1 year warranty.

Code Number of Circuits

- 1 1 Circuit
- 2 2 Circuits

Code Communications

- 0 ModBus RTU/RS485 (& RS422)
- 1 ModBus TCP/Ethernet
- 2 Webserver/Ethernet
- 3 BACnet/Ethernet**
- 9 Other Communications

Code Enclosure Enclosure Size H x W x D, In (cm)

- 0 NEMA 4X Fibreglas 10 x 8 x 8 (25 x 21 x 20)
- 1 NEMA 4X 316 SS 12 x 10 x 8 (30 x 25 x 19)

Code Add to Complete Model Number

0

CTC Typical Model Number

Note: The CTC comes complete with one set of 16 gauge stainless steel wall mounting brackets.

** Only Single Circuit CTC Controllers can have BACnet inside of controller.

Two Circuit CTC Controllers must use external BACnet Converter - see MBC data sheet for more information.

| Model | Description | PCN |
|----------|----------------------------|--------|
| CTC1-000 | ITC 1 Loop, FG ENC, RS485 | 512655 |
| CTC2-000 | ITC 2 Loop, FG ENC, RS485 | 512663 |
| CTC1-100 | ITC 1 Loop, FG ENC, BACnet | 512671 |