SHIMADEN SOLID STATE RELAY

PAC03B 10A, 20A, 40A

- DIN rail mountable (Mounting Plate : Option)
- Current Capacity: 10A / 20A / 40A
- Terminal Cover for greater safety
- LED indicator turns on when control
- Internal Barister absorbs external surge current
- Separate heat sink available (Option) for maximum performance





SPECIFICATIONS

Power Supply: Operational Load Voltage Range: Current Capacity:

Current Capacity:	
	(With Heat Sink, Ambient Temperature below 40°C)
Control Input:	
Control Voltage:	3.5~30V DC
Off Voltage:	1.0V DC max
Input Current:	10mA max
Control Element:	Triac
Control Mode:	Zero voltage switching
Output Characteristics:	
Leakage Current (when output 'OFF'):	12mA max (Power Apply=200V AC)
Voltage Drop (when output 'ON'):	1.5V max (Operational Ambient Temperature=25°C)
Minimum Load Current:	1.0Arms (Ampere root mean square)
Output Protection:	Internal Barister (430V)
Operational Lamp:	Red LED lamp
Insulation Resistance:	Between input/output terminals and housing case 500V DC 100 $\text{M}\Omega$ min
Dielectric strength:	Between input/output terminals and housing case 3000V AC 1 minute
Operational Ambient Temperature:	-20~80°C
Storage temperature:	-30~100°C
Weight:	Without heat sink With heat sink
	65g (10A/20A) Approx. 260g (10A/20A)
	95g (40A) Approx. 390g (40A)


100~240V 50 / 60Hz

35~264V 50 / 60Hz 10A, 20A, 40A


ORDERING CODE (PAC03B Solid State Relay)

ITEM	CODE	SPECIFICATIONS		
SERIES	PAC03B-	Zero Voltage Switching Control, Solid State Relay		
CURRENT CAPACITY 020- 040-		010–	D- 10A	
		20A		
		040-	40/	40A
Heat Sink or0DIN rail mounting plate23		0	None	
			1	With heat sink (10A/20A)
		2	With heat sink (40A)	
		3	DIN rail mounting plate	
REMARKS			0 Without	
			9 With(Please consult before ordering.)	


AMBIENT TEMPERATURE & LOAD CURRENT CHARACTERISTIC

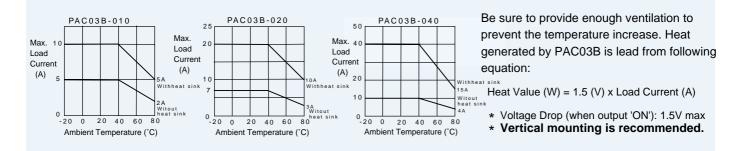

WIRING EXAMPLE

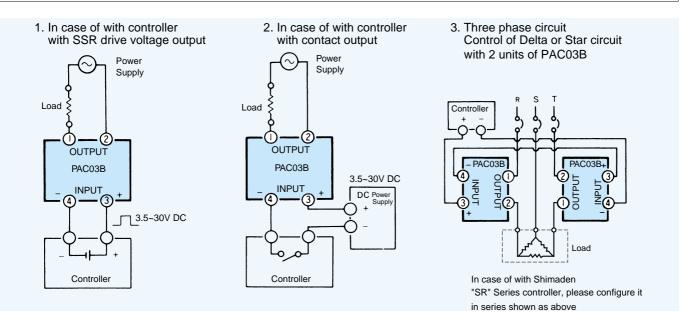

EXTERNAL DIMENSIONS

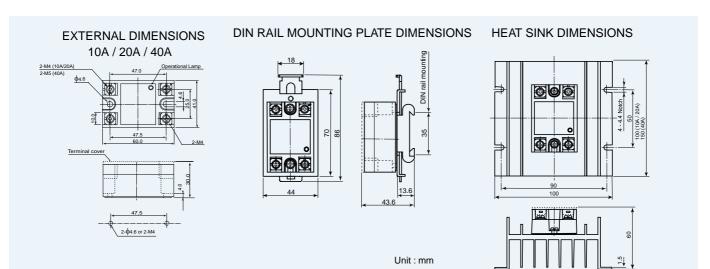

A Warning

- This product is designed for controlling the power of a heater or similar equipment used in a general industrial facilities. (It is not to be used for any purpose which regulates the prevention of serious effects on human life or safety.)
- If the possibility of loss or damage to your system or property as a result of failure of any part of the process exists, proper safety measures must be made before the instrument is put into use so as to prevent the occurrence of trouble.



(The contents of this brochure are subject to change without notice.)



Head Office: 2-30-10 Kitamachi, Nerima-Ku, Tokyo 179-0081 Japan Phone: +81-3-3931-7891 Fax: +81-3-3931-3089 E-MAIL: exp-dept@shimaden.co.jp URL: http://www.shimaden.co.jp